



DOUBLE DOORS  
INTERIOR VIEW

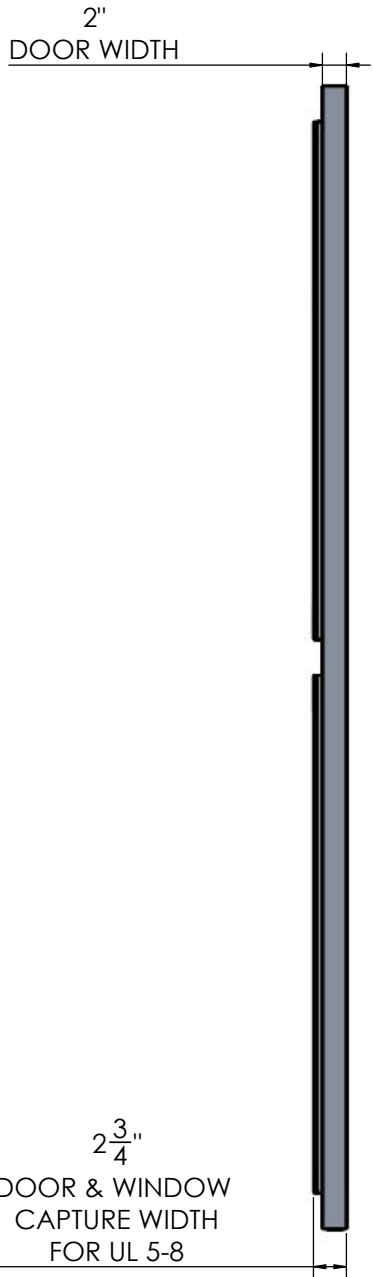

DOUBLE DOORS  
PROFILE VIEW

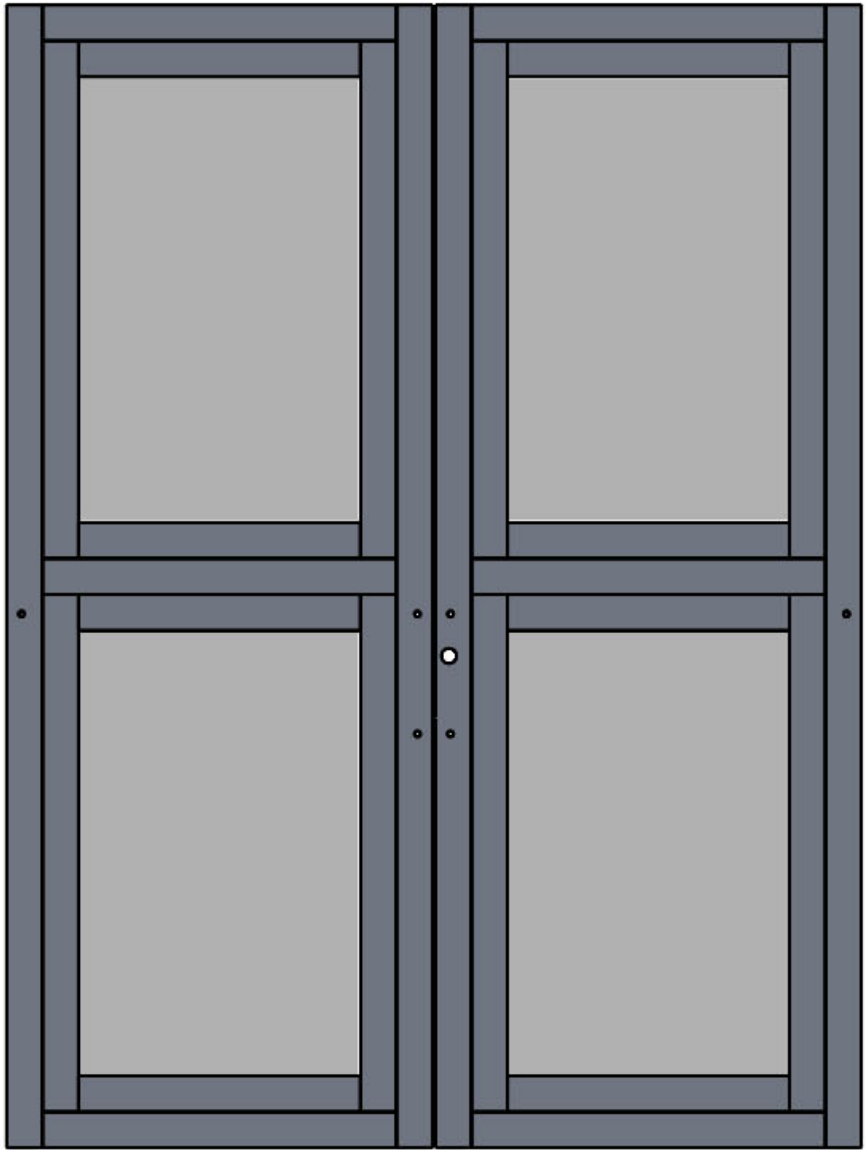

DOUBLE DOORS  
EXTERIOR VIEW

- NOTES:
- 1. 2" THICK DOOR SLAB
  - 2. STANDARD COATINGS:
    - 1. ALUMINUM - POWDER COAT <https://www.tcipowder.com/products/color-cards/stock-color-card/>
    - 2. GLASS - CLEAR
  - 3. STANDARD LOCK HARDWARE: 2 1/8" THROUGH HOLE FOR LOCKSET, OPTION FOR DEABOLT OR MORTISE LOCKSET
  - 4. STANDARD BALLISTIC RATING: UL 752 LEVELS 1-3, OPTIONS FOR UL 752 LEVELS 4-8 UPON REQUEST
  - 5. STANDARD HINGE - CONTINUOUS GEAR HINGE
  - 6. CLOSER - UPON REQUEST
  - 7. ADA COMPLIANT UPON REQUEST

PROPRIETARY &  
CONFIDENTIAL  
THE INFORMATION  
CONTAINED IN THIS  
DRAWING IS THE SOLE  
PROPERTY OF KONTEK.  
ANY PRODUCTION IN  
PART OR AS A WHOLE  
WITHOUT THE WRITTEN  
PERMISSION OF KONTEK  
IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NAME	DATE
DRAWN NAK	8/8/24
CHECKED AB	8/8/24
APPROVED	
SHEET SIZE	SCALE
D	NTS
REV.	A



805 McCombs Avenue  
Kannapolis, NC 28083

ALUMINUM DOORS -  
ALL GLASS PANELS

DWG. NO.  
**K24020**  
SHEET 1