




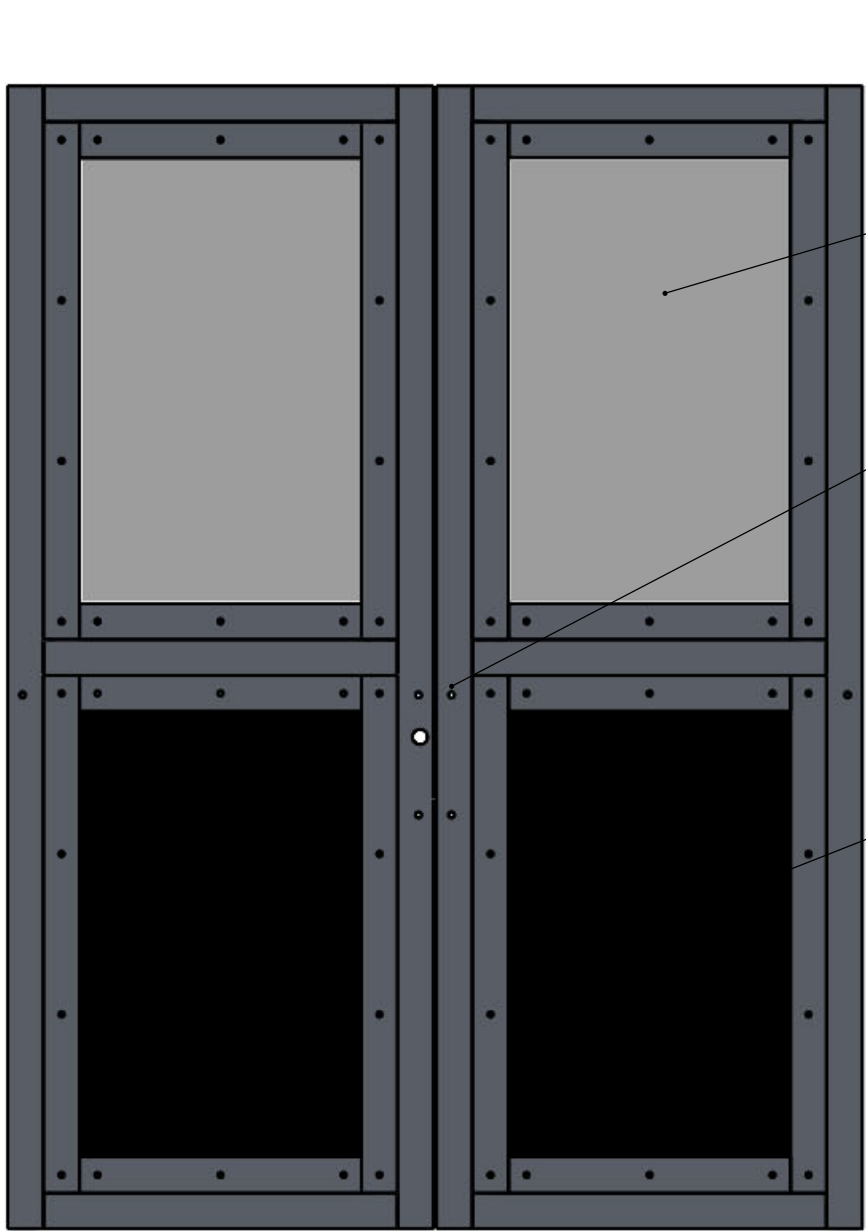

DOUBLE DOORS
INTERIOR VIEW

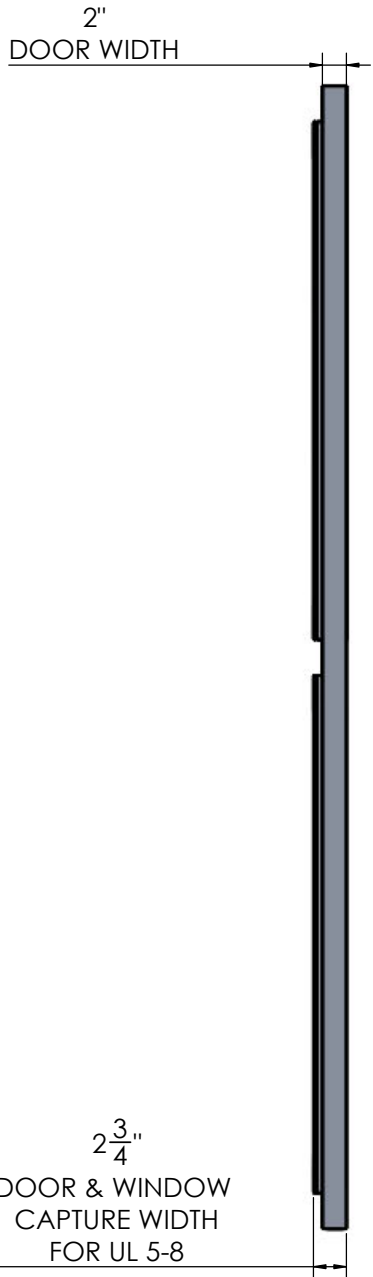

DOUBLE DOORS
PROFILE VIEW

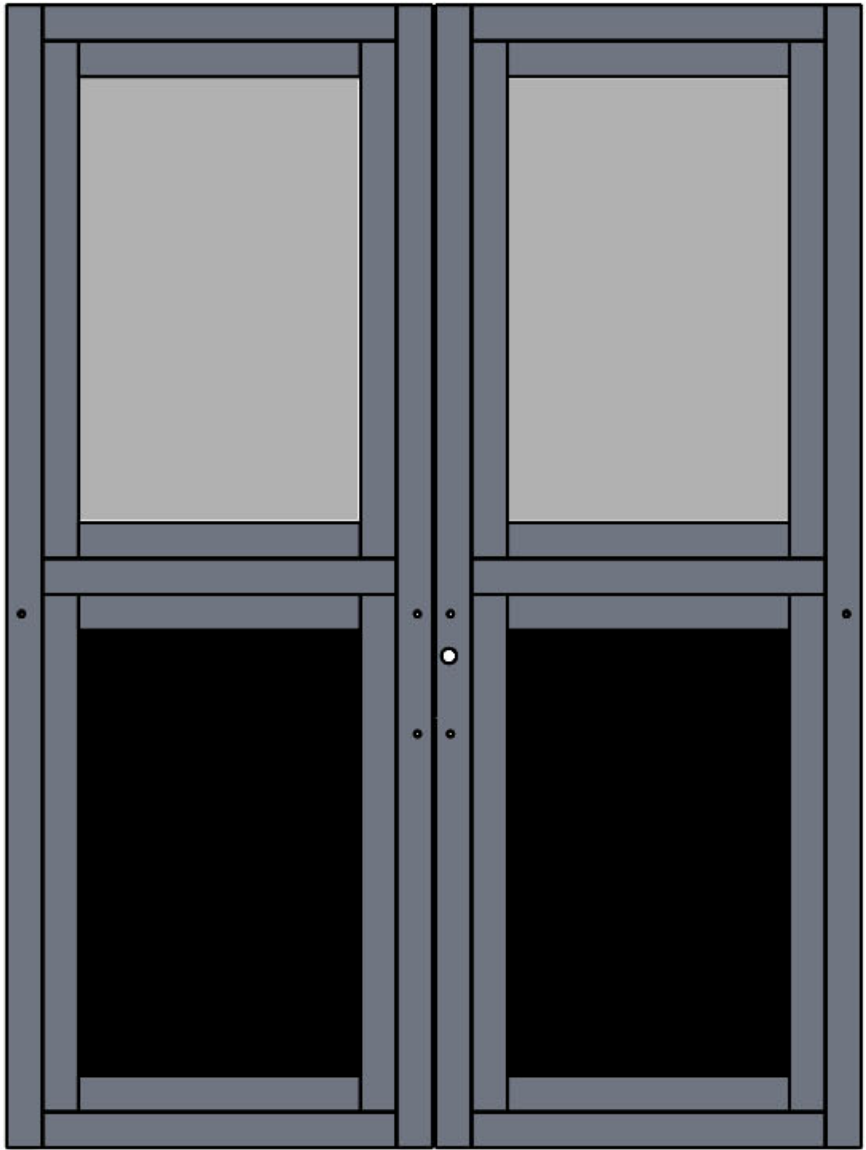

DOUBLE DOORS
EXTERIOR VIEW

- NOTES:
- 1. 2" THICK DOOR SLAB
 - 2. STANDARD COATINGS:
 - 1. ALUMINUM - POWDER COAT <https://www.tcipowder.com/products/color-cards/stock-color-card/>
 - 2. GLASS - CLEAR
 - 3. STANDARD LOCK HARDWARE: 2 1/8" THROUGH HOLE FOR LOCKSET, OPTION FOR DEABOLT OR MORTISE LOCKSET
 - 4. STANDARD BALLISTIC RATING: UL 752 LEVELS 1-3, OPTIONS FOR UL 752 LEVELS 4-8 UPON REQUEST
 - 5. STANDARD HINGE - CONTINUOUS GEAR HINGE
 - 6. CLOSER - UPON REQUEST
 - 7. ADA COMPLIANT UPON REQUEST

PROPRIETARY &
CONFIDENTIAL
THE INFORMATION
CONTAINED IN THIS
DRAWING IS THE SOLE
PROPERTY OF KONTEK.
ANY PRODUCTION IN
PART OR AS A WHOLE
WITHOUT THE WRITTEN
PERMISSION OF KONTEK
IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NAME	DATE
DRAWN NAK	8/8/24
CHECKED AB	8/8/24
APPROVED	
SHEET SIZE	SCALE
D	NTS
REV.	A



805 McCombs Avenue
Kannapolis, NC 28083

ALUMINUM DOORS -
HALF LITE

DWG. NO.
K24020
SHEET 2